

USER GUIDE

Four-Tap Nitro Coffee Kit • ULABACKBARCOFFEE4



WELCOME TO U-LINE

Congratulations on your U-Line purchase. Your product comes from a company with over five decades of premium modular ice making, refrigeration, and wine preservation. U-Line continues to be the American leader, delivering versatility and flexibility for multiple applications including residential, light commercial, outdoor and marine use. U-Line's complete product collection includes Wine Captain Models, Beverage Centers, Clear ice Machines, Crescent Ice Makers, Glass and Solid Door Refrigerators, Drawer Models, Freezers, Combo Models, and more.

U-Line has captivated those with an appreciation for the finer things with exceptional functionality, style, inspired innovations and attention to even the smallest details. We are known and respected for our unwavering dedication to product design, quality and selection. U-Line is headquartered in Milwaukee, Wisconsin and has shipped product to five continents for over two decades and is proud to have the opportunity to ship to you. U-Line - RIGHT PRODUCT. RIGHT PLACE. RIGHT TEMPERATURE®.

PRODUCT INFORMATION

Looking for additional information on your product? User Guides, Spec Sheets, CAD Drawings, Compliance Documentation, and Product Warranty information are all available for reference and download at u-line.com.

PROPERTY DAMAGE / INJURY CONCERNS

In the unlikely event property damage or personal injury is suspected related to a U-Line product, please take the following steps:

1. U-Line Customer Care must be contacted immediately at +1.414.354.0300.
2. Service or repairs performed on the unit without prior written approval from U-Line is not permitted. If the unit has been altered or repaired in the field without prior written approval from U-Line, claims will not be eligible.

GENERAL INQUIRIES

U-Line Corporation
8900 N. 55th Street
Milwaukee, Wisconsin 53223 USA
Monday - Friday 8:00 am to 4:30 pm CST
T: +1.414.354.0300
Email: sales@u-line.com
u-line.com

SERVICE & PARTS ASSISTANCE

Monday - Friday 8:00 am to 4:30 pm CST
T: +1.414.354.0300
Service Email: onlineservice@u-line.com
Parts Email: onlineparts@u-line.com

CONNECT WITH US



Table of Contents

Parts Lists 4

Safety and Warning 4

Tower Installation 5

Connections 8


Warranty 11



General Installation

The following components are shipped inside the unit:

1. Four-Tap tower (faucets, handles, & hardware)
2. Nitrogen hoses (connecting hardware)
3. Infuser regulators (mounting hardware)
4. Liquid jumper hoses (with in-line filters) and gas jumper hoses
5. Drip tray
6. Cleaning solution (2-ounce packet)
(Additional cleaner, ULACOFFEECLEAN, is available at u-line.com)
7. Two 2.5 Gallon ball lock kegs
8. Adapter plate and foam rubber gasket

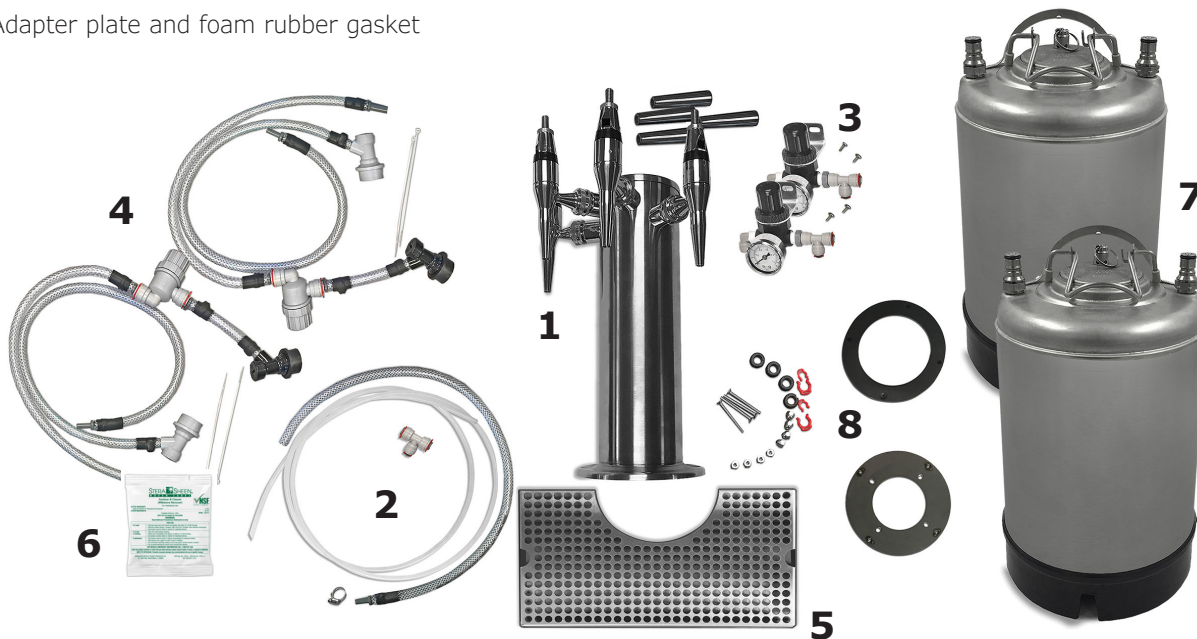

Required (not included):

1. Food grade nitrogen - available at your local gas supplier. 22 cubic feet aluminum empty tank (ULANITROTANK) and nitrogen regulator (ULANITROREG) are available at u-line.com.

Note: If using an external nitrogen source, see CONNECTING EXTERNAL NITROGEN SOURCE section.

2. Food-grade lubricant if connecting to external nitrogen source.



3. Your favorite cold coffee or tea.

Safety and Warning



Keep nitrogen tank in an upright position and handle with care.

Never exceed 60 PSI.


Ventilate area after nitrogen leak.

Connect Hoses to Tower

Make all the hose connections to the tower prior to installing tower onto refrigerator.




1. Attach gas jumper hoses - line up and press in firmly.

Note: The connectors at the ends of the gas jumper hoses are narrower to correspond with the connections in the tower.

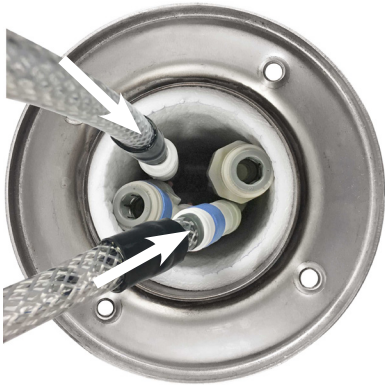

2. Attach liquid jumper hoses - line up and press in firmly.

Note: The connectors at the end of the liquid jumper hoses are wider to correspond with the connections in the tower.

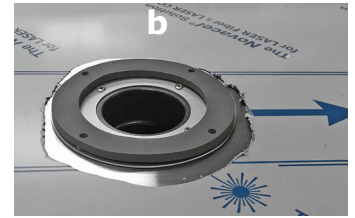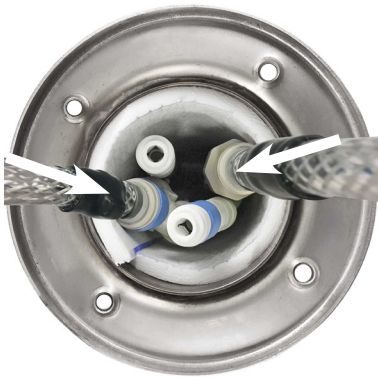

3. Insert all 4 hoses into the opening.



Note: 2 of the connections inside tower have color banding to help keep coffee and gas hoses organized. Mark or tie together 2 matching nitrogen and coffee hoses prior to inserting into refrigerator.



Install Tower on Refrigerator

Do not remove all the protective film on the stainless exterior until the tower is installed.

1. Align tower with draft hole, mark and drill holes for mounting hardware.
2. Install adapter plate to unit with 4 long screws and nuts (a) then place foam rubber gasket on top - align holes (b).

4. Install tower to unit with 4 short Philips screws.


NOTE: It will be necessary to press down firmly while tightening the screws. Compressing the foam rubber gasket ensures an airtight seal between the unit and the tower.




Connect to Nitrogen Tank

Assemble and connect tank regulator to tank

1. Attach ball valve to tank regulator (not included). Tighten with an adjustable wrench. Make sure valve is in the off position - turned clockwise as far as it can go.

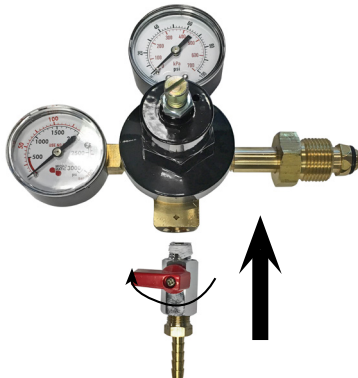


2. Attach regulators to nitrogen tank. Hand tighten the coupling nut and then use an adjustable wrench for an additional quarter turn. DO NOT OVER TIGHTEN.

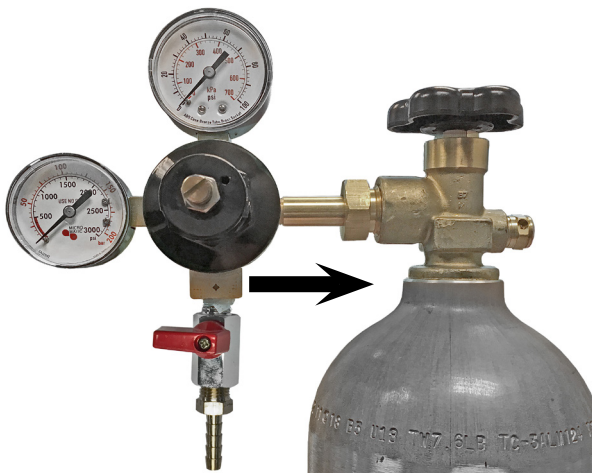

3. Attach nitrogen hose to ball valve on tank regulator. Make sure valve is in the off position - turned clockwise as far as it can go.




4. Attach other end of nitrogen hose to T-connector on gas hose that goes to each infuser regulator.

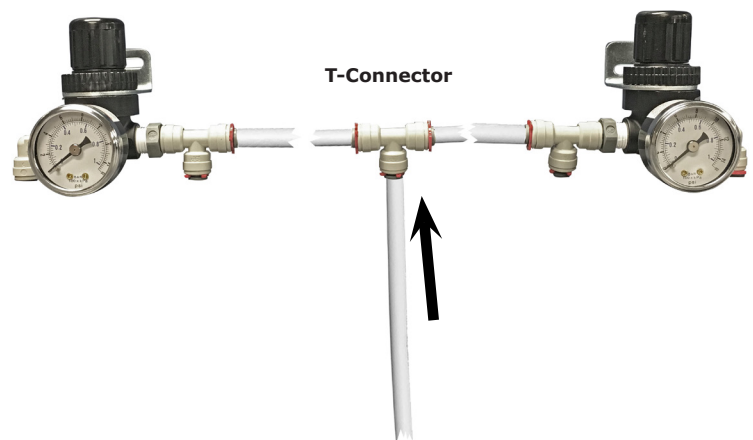

Connect nitrogen to keg


1. Attach gas hoses to elbow connectors on infuser regulators - line up and press in firmly.

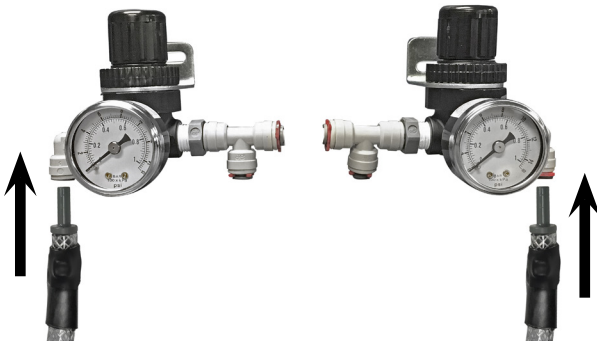

2. Attach gray coupler of the gas jumper hoses to kegs. With your thumb press down on the top of the coupler while pulling up on collar. Press coupler down firmly onto "in" valve. Release collar - listen for a click. Pull up on the coupler to ensure it is locked down.




3. Attach infuser hoses to T-connectors on infuser regulators.

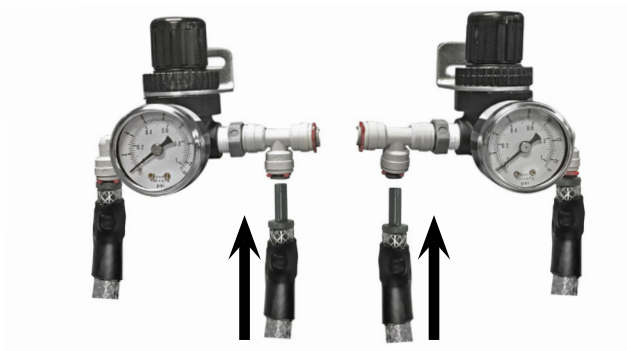


Connect keg to tower

1. Attach black couplers of the liquid jumper hoses to keg. With your thumb press down on the top of the coupler while pulling up on collar. Press coupler down firmly onto "out" valve. Release collar - listen for a click. Pull up on the coupler to ensure it is locked down.

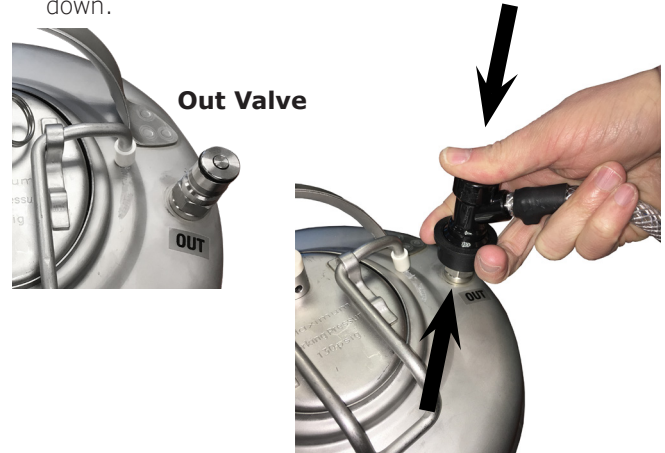

Connections

When complete, the connections should look like this:

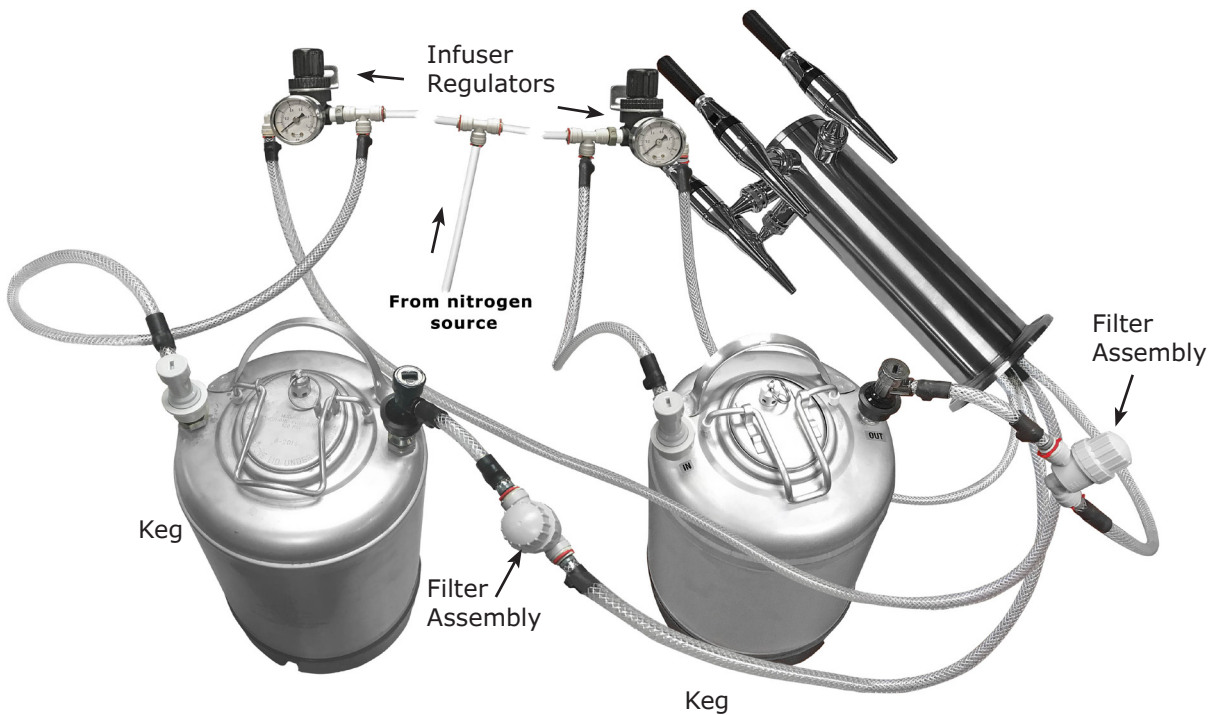

Warranty / Support

U-Line will replace missing or defective components for 60 days from date of purchase. Contact U-Line at +1.414.354.0300. Proof of purchase is required.

Additional tap accessories and cleaning solution are available at your local brewing supply store or online.