

Traditional Italian design wall mount chimney hood. Design includes modern features and high performance necessary in today's upscale residential kitchens.

SIZE	MODEL NO. - STAINLESS	NON-DUCTED KIT (Includes Non-Ducted Filters)	NON-DUCTED FILTERS
30-in. Wide	WTT32I330SB	ANKWTT320	AFCWTT32 (Includes 2 filters)
36-in. Wide	WTT32I336SB	ANKWTT326	AFCWTT326 (Includes 2 filters)
42-in. Wide	WTT32I342SB	ANKWTT326	AFCWTT326 (Includes 2 filters)

PERFORMANCE

Model No.	Size	Damper/Duct Connector	Volts	Amps	Sones		CFM	
					Normal	High	Normal	High
WTT32I330SB	30-in. Wide	8-in. Round (Included)	120	1.7	0.8	4.5	150	300
WTT32I336SB	36-in. Wide	8-in. Round (Included)	120	1.7	0.8	4.5	150	300
WTT32I342SB	42-in. Wide	8-in. Round (Included)	120	2.0	0.8	4.5	150	300

FEATURES

Wall Mount	Yes
Finish	430 Stainless Steel #4 Brushed
Cooktop Lighting	3-Level Halogen - (2) 50W, GU10 Lamps - (3) Lamps on 42-in. Wide Hood - Bulbs included.
Heat Sentry™	Yes - Automatically turns blower to high speed when excess cooking heat is detected.
Grease Filters	Quick-release Stainless Steel, Aluminum Mesh - Dishwasher safe
Delay Timer	Yes - Automatically shuts off range hood after 5 minutes.
ENERGY STAR®	No
Recirculation	Yes

OPTIONAL ACCESSORIES

Non-Ducted Kit	(See above)
Non-Ducted Filters	(See above)
Flue Extension	AEWTT32SB (for 10-ft. ceilings)



MOUNTING HEIGHT

24-in. to 30-in. from cooktop to bottom of hood

LIMITED WARRANTY

1-year (See installation manual for full warranty text.)

FOR INDOOR USE ONLY

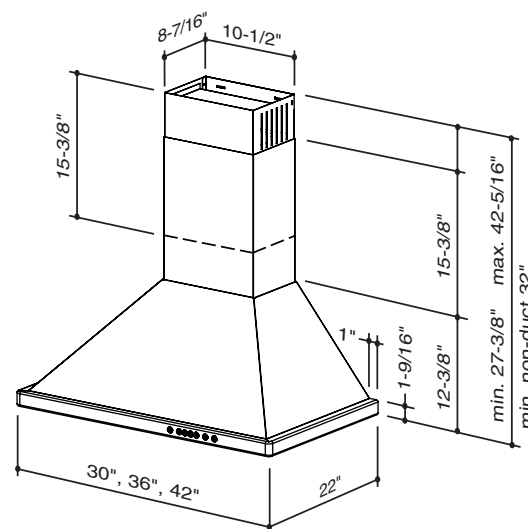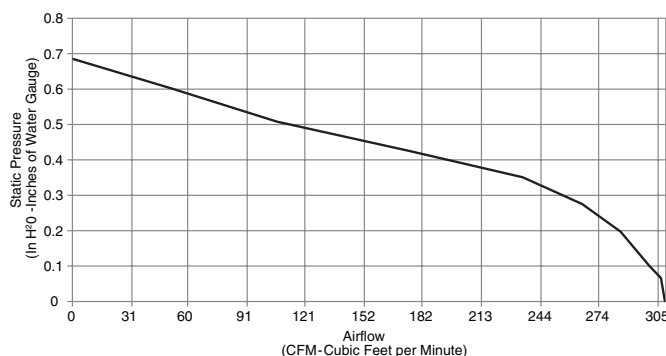

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

99045954B

FORTE - WTT32I3 SERIES

