

NEW DESIGN

Monogram Refrigerators

Anywhere Convenience!

Wine Chiller and Beverage Center

The new Monogram® Wine Chiller and Beverage Center can be installed just about anywhere. Use them individually or as a pair, free-standing or beneath a countertop, and to make it just right, the door swing can be reversed.



The tinted glass doors are framed in stainless steel. The Monogram tubular handle on the chamfered edge completes the design. Stain the heart of cherry wood drawer fronts to match the décor. Drawers slide-out smoothly on Accuride® full extension slides for easy access.

Free-Standing Stainless Steel Side-by-Side Refrigerators

Simply dramatic, bold and striking! These refrigerators are completely encased in stainless steel. One 26 cu. ft. and another 23 cu. ft. capacity, both with the same impressive list of convenience features. The ZFSB23 has a 24" deep case that aligns with adjacent cabinetry, saving 4" of floor space at the front!



Energy Star®
Qualified.

Simply elegant, Side-by-Side and Bottom-Freezer Refrigerators

√ Both designs offer sleek details, seamless corners, concealed hinges and simplified customization options. Stainless models have beveled edges.



Framed Panels



Overlay Panels



Stainless Steel

√ Side-by-side models with extra tall dispenser have a proximity sensor that lights up the controls as you approach, they vanish when you walk away.



All dispenser models
are Energy Star®
Qualified.



Built-In Side-by-Side Refrigerators

	ZB14400DM ZB14400M ZB14400MS	ZB16400DM ZB16400M ZB16400MS	ZB18400DM ZB18400M ZB18400MS
Dispenser Models			
Total (cu. ft.)	30.7	26.1	21.7
Fresh Food (cu. ft.)	17.8	16.3	11.9
Freezer (cu. ft.)	12.9	9.8	9.8
Energy Star® Qualified	•	•	•
Disappearing Glass Touch Dispenser Controls	•	•	•
Cubes, Crushed Ice & Chilled Water	•	•	•
Non-Dispenser Models			
Total (cu. ft.)	30.6	26.0	21.6
Fresh Food (cu. ft.)	17.8	16.3	11.9
Freezer (cu. ft.)	12.8	9.7	9.7
Fresh Food Features			
Upfront Dual Electronic Controls	•	•	•
Multi-Shelf Air Management Tower	•	•	•
Climate Control Drawer w/Express Chill, Thaw, Select Temp	•	•	•
Spill-Proof Glass Shelves	4	4	4
Sealed Adj. Humidity Produce Pan with Easy Access Lid	•	•	•
Adjustable Sealed Deli Pan	•	•	•
Adjustable Door Bins	4	4	4
Gallon Door Storage	•	•	•
Freezer Section			
Utility Baskets	2	2	2
Adjustable Shelves (wire)	4	4	4
Icemaker/Removable Ice Bin	•	•	•
Adjustable Door Bins	•	•	•
General Features			
Overhead Evaporator	•	•	•
Easy Access Hinged Grille	•	•	•
Multi-Shelf Halogen Light Towers	•	•	•
GE SmartWater™ Filtration System	•	•	•
Drawers/Baskets on Full Extension Slides	•	•	•
Master Light Switch	•	•	•
Overall Dimensions (WxHxD in inches)	48x84 x23-7/8	42x84 x23-7/8	36x84 x23-7/8
115 volts/20 Amps	•	•	•

Warranty Information:

- Full Two-year Warranty, parts and labor.
- Full Five-year Warranty, parts and labor on the sealed refrigerating system (the compressor, condenser, evaporator and all connecting tubing).
- Limited Twelve-Year Warranty on the sealed system, parts.
- Limited Lifetime Warranty on full extension slides.

See written warranty for details.

The Basics:

- ✓ Climate Control Drawer is a system that provides: Express Thaw, 1/2 lb. in 4 hrs and up to 3 lbs. in 12 hours. Express Chill to chill a beverage can in 15 minutes, 2-liter or gelatin in 45 minutes. Select Temp with settings for citrus at 43°F, produce at 34°F and meat at 32°F.
- ✓ Trimmed refrigerators are designed to be customized with field installed 1/4" framed or 3/4" overlay door and grille panels. No kits required.
- ✓ Exclusive easy access grille panel.
- ✓ Overhead evaporator provides direct airflow to each compartment, maximizes storage capacity and optimizes energy efficiency.
- ✓ 2-position handles adjust to accommodate 1/4" framed or 3/4" overlay panel thickness. Or, on 3/4" panels, replace the supplied handles with custom handles of your choice – no kits required.
- ✓ The 2-position door stop is factory set for a 130° door swing and can be adjusted to stop at 90°. Again, no kit required for this adjustment.
- ✓ Easy height adjustment. 83-1/2" to 84-1/2" installation heights are accomplished by adjusting the leveling legs and wheels. No kits required.

Advance Planning
Side-by-Side Refrigerators


Monogram refrigerators can either be a focal point in the kitchen, or they can blend into the woodwork. Follow these steps to accomplish the effect you have envisioned.

1. Consider the available space including clearances to walls, islands or cabinetry. Select a 36", 42" or 48" wide model. See Diagram 1 through 4.
2. Choose a stainless steel model **OR** a trimmed model that can be customized to match panels and handles with surrounding cabinetry.
3. For trimmed models, order custom door and grille panels from the cabinet manufacturer. See custom panel sizes, pages 18, 20 and 21. Optional black, white and stainless steel accessory panels may be ordered from your Monogram supplier.

Refer to Design Guide and Installation Instructions for complete details:
Pub. No. 49-60138


Product Dimensions and Clearances

*Shipping height. The refrigerator can be adjusted to fit into a cutout that is 83-1/2" min. to 84-1/2" max. height. Note that the top case trim at the front is 1/2" higher and will overlap upper cabinetry or soffit. Use leveling legs and wheels for height adjustment.

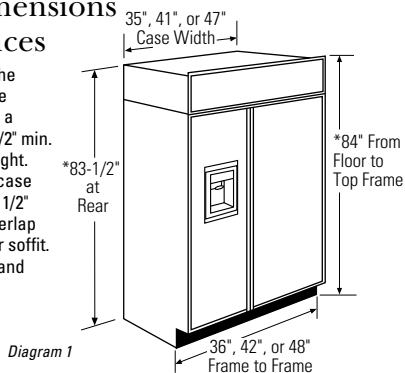

The Installation Space

Water and electrical supply must be located as shown.


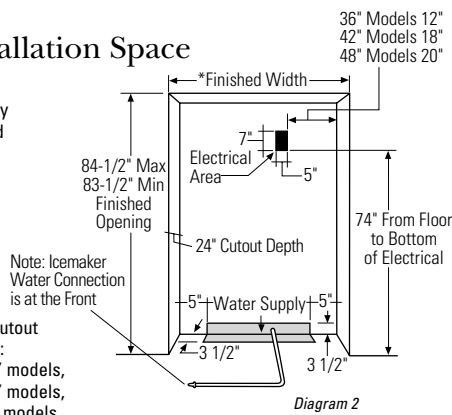


* The finished cutout width must be:
 - 35-1/2" for 36" models,
 - 41-1/2" for 42" models,
 - 47-1/2" for 48" models

Note: The case trim overlaps cabinets at the top and sides. Frameless cabinets may require filler strips to prevent interference with cabinet door swing. The opening width must allow for filler strips.

Corner Installation

These refrigerators have a 2-position door stop. The factory set 130° door swing can be adjusted to 90° if clearance to adjacent cabinets or walls is restricted.

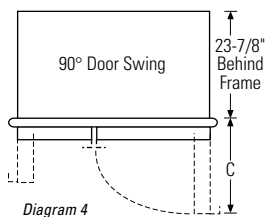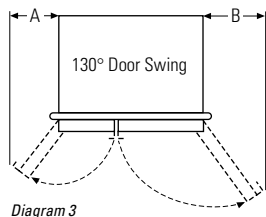

Models	A	B	C
36"	13"	15"	20-5/8"
42"	13"	19"	26-5/8"
48"	15"	20"	28-5/8"


Allow min. clearances shown for a full 130° door swing and pan removal. 4" min. clearance is required when adjusted to 90°. Pan access is maintained, but pan removal is restricted.

Simplified Customization

Field installed custom door and grille panels are required for trimmed models.

1/4" Framed Panels


You may install 1/4" thick custom panels from your cabinet manufacturer. The decorative panel slides into the factory installed trim. No kits required.

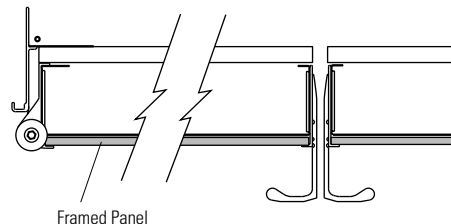

Standard supplied handles shown in 1/4" panel position.

3/4" Overlay Panels


You may also choose to install 3/4" custom overlay panels from your cabinet manufacturer. This design provides a seamless appearance which integrates smoothly with surrounding cabinetry. The panels slide into the factory installed trim, without additional kits.

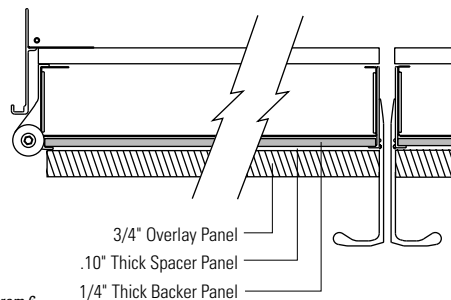

Standard supplied handles shown in 3/4" overlay panel position.

Handle Adjustment

The supplied handles can be adjusted to fit both framed or overlay panels. Or, custom handles supplied by your cabinet maker may also be installed on 3/4" custom panels.

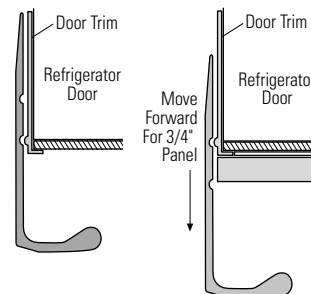

Side-by-Side 1/4" Framed Panel

If you choose to install framed panels, they must be cut to the dimensions shown. The panels will slide into the frame on the doors and grille.

- If the custom panel is less than 1/4" thick, it must be backed up with a piece of filler material or foam tape to improve the fit.

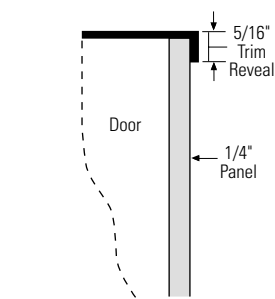


Diagram 8

1/4" Framed Panel Dimensions

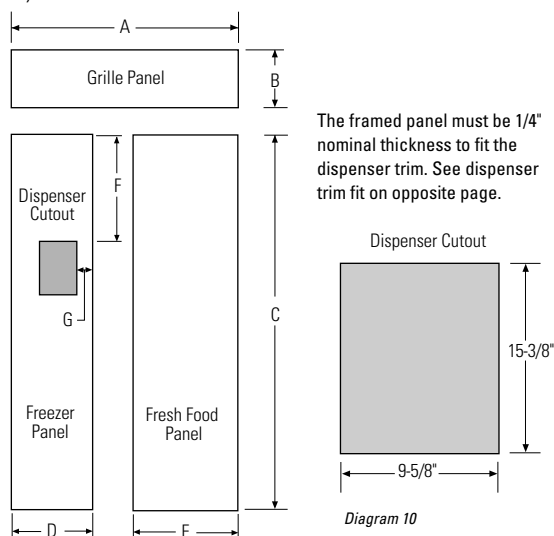


Diagram 9

Side-by-Side (in inches)

	A	B	C	D	E
36" Models	33-7/8	9	68-3/8	14-9/16	18-9/16
42" Models	39-7/8	9-1/2	68-3/8	14-9/16	24-9/16
48" Models	45-7/8	9-1/2	68-3/8	18-9/16	26-9/16

Dispenser Cutout Position (in inches)

	F	G
36" Models	17-13/16	3-1/8
42" Models	17-13/16	3-1/8
48" Models	17-13/16	5-1/8

IMPORTANT NOTE:

Maximum weight for fresh food panel is 50 pounds and 30 pounds for the freezer panel.

Dispenser Trim Fit on 1/4" Panel

These refrigerators are supplied with two dispenser trims, one to fit framed panels and one for overlay panels. The framed panel must be 1/4" nominal thickness to fit the dispenser trim.

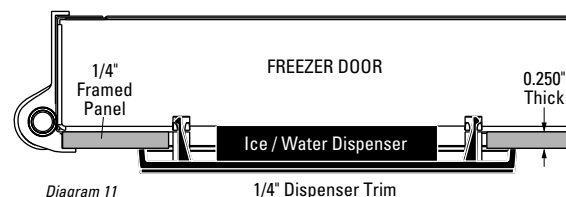


Diagram 11

- The trim clips will not engage the door if the panel is more than 0.250" thick.
- If the panel is less than 0.250" thick, a noticeable gap may be created around the dispenser trim. Foam tape may be applied between the door and the panel to improve the fit.

Accessory Panels

White or black acrylic and stainless steel accessory panels are available from your Monogram supplier. Panels are cut to size and ready to install.

Models	White	Black	Stainless
ZISW480D	ZPW480D		ZPS480D
ZISB480D		ZPB480D	ZPS480D
ZIS480N	ZPW480N	ZPB480N	ZPS480N
ZISW420D	ZPW420D		ZPS420D
ZISB420D		ZPB420D	ZPS420D
ZIS420N	ZPW420N	ZPB420N	ZPS420N
ZISW360D	ZPW360D		ZPS360D
ZISB360D		ZPB360D	ZPS360D
ZIS360N	ZPW360N	ZPB360N	ZPS360N

Anti-Tip Protection is Required

These refrigerators are top-heavy. They must be secured to prevent the possibility of tipping forward. Anti-tip brackets are packed with the refrigerator. For additional security, the refrigerator should also be secured to adjacent cabinetry. See installation instructions for details.

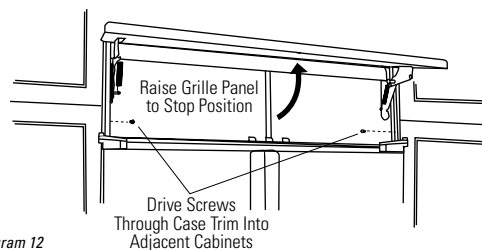


Diagram 12

Side-by-Side 3/4" Overlay Panel

Overlay panels may be installed on trimmed refrigerators.

- The overlay panel must be secured to a 1/4" thick backer panel which slides into the trim. A .10" thick spacer panel must be placed between the overlay and backer panel.

Diagram 13

$$.250" + .10" + .750" = 1.100" \text{ Total Panel Thickness}$$

Assemble overlay panels with glue and screws.

- Center spacer panel on the backer panel, left to right and top to bottom. Secure the panels with glue.
- Center the spacer/ backer panel on the overlay panel and secure with glue and screws. Screws must be countersunk into the backer panel.

Note: Left-to-right offset is not always equal to top-to-bottom offset.




Diagram 14

3/4" Overlay Panel Dimensions

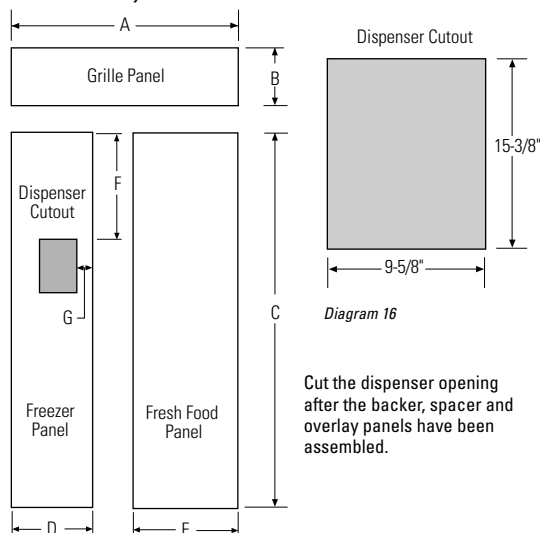


Diagram 15

IMPORTANT NOTE:

Maximum total weight for fresh food panel is 50 pounds and 30 pounds for the freezer panel.

Dispenser Trim Fit on Overlay Panels

These refrigerators are supplied with two dispenser trims, one to fit framed panels and one for overlay panels. The assembled overlay panel must be 1.100" thick to fit the dispenser trim. See panel assembly on opposite page.

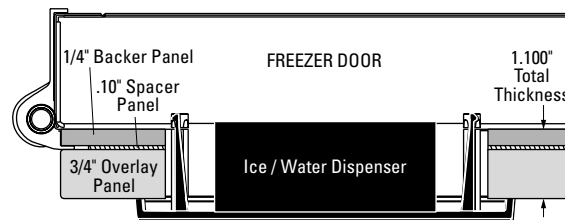


Diagram 17

3/4" Overlay Dispenser Trim

- The trim clips will not engage the door if the panel is more than 1.100" thick.
- If the panel is less than 1.100" thick, a noticeable gap may be created around the dispenser trim.
- Alternative panel construction methods such as securing a 3/4" panel to a 1/4" backer panel without a spacer panel should not be used. Another method, routing a 3/4" thick panel on all sides, also should not be used. These methods will not result in the required 1.100" total panel thickness.

36" Side-by-Side (in inches)

	A	B	C	D	E
1/4" Backer Panel	33-7/8	9	68-3/8	14-9/16	18-9/16
.10" Spacer Panel	33	8-3/8	67	13-1/4	17-1/4
3/4" Overlay Panel	34-1/8	9-1/4	68-5/8	14-13/16	18-13/16

42" Side-by-Side (in inches)

	A	B	C	D	E
1/4" Backer Panel	39-7/8	9-1/2	68-3/8	14-9/16	24-9/16
.10" Spacer Panel	39	8-5/8	67	13-1/4	23-1/4
3/4" Overlay Panel	40-1/8	9-3/4	68-5/8	14-13/16	24-13/16

48" Side-by-Side (in inches)

	A	B	C	D	E
1/4" Backer Panel	45-7/8	9-1/2	68-3/8	18-9/16	26-9/16
.10" Spacer Panel	45	8-5/8	67	17-1/4	25-1/4
3/4" Overlay Panel	46-1/8	9-3/4	68-5/8	18-13/16	26-13/16


Dispenser Cutout Position (in inches)

	F	G
36" Models	17-15/16	3-1/4
42" Models	17-15/16	3-1/4
48" Models	17-15/16	5-1/4

Raised Overlay Panel Design For Dispenser Models


When a raised panel design is to be used, a custom wide middle rail on the freezer door is required to accommodate the dispenser trim.

- The middle rail must be 1.100" total thickness to accept the dispenser trim.
- The middle rail must be wide enough to allow for the dispenser trim to overlap the opening.

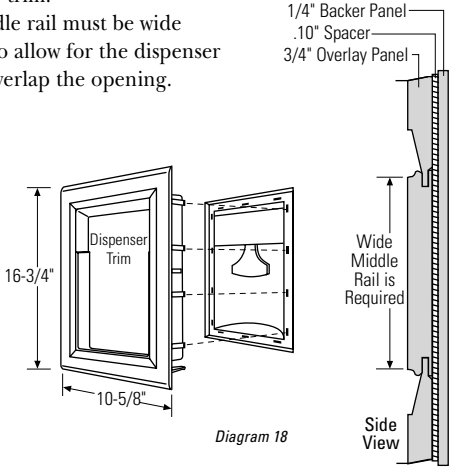

Anti-Tip Protection is Required

These refrigerators are top-heavy. They must be secured to prevent the possibility of tipping forward. Anti-tip brackets are packed with the refrigerator. For additional security, the refrigerator should also be secured to adjacent cabinetry. See installation instructions for details.

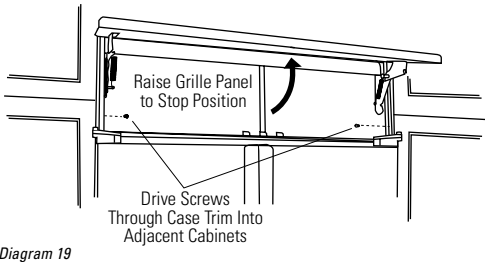

Tubular Handle Kit

ZKHSS2: Monogram Tubular Stainless Steel Handles designed to fit 3/4" overlay panels. Order this kit from your Monogram supplier.

Side Panels

Side panels must be used whenever the sides of the refrigerator will be exposed.

The Overhead Evaporator

Direct Airflow

Cool air is delivered straight from the overhead evaporator to the freezer and fresh food compartments, allowing independent airflow for each zone without any direct air exchange.

Largest Capacity

The outside location of the overhead evaporator makes the Monogram side-by-side refrigerator more spacious inside. It's the largest capacity built-in refrigerator available, with up to 2.7 cu. ft. more capacity.

Most Energy Efficient

The Monogram side-by-side refrigerator uses up to 14% less energy per cubic foot than other leading built-in models, which means it is the most energy efficient built-in refrigerator available.



SubZero Capacity Comparison

	Monogram			SubZero			Difference	
	Freezer	Fresh Food	Total	Freezer	Fresh Food	Total	Monogram Cu Ft Larger	% Larger
48" w/Disp	12.90	17.80	30.70	9.80	18.20	28.00	2.70	9.64%
48" w/o Disp	12.80	17.80	30.60	9.80	18.90	28.70	1.90	6.62%
42" w/Disp	9.80	16.30	26.10	8.20	15.60	23.80	2.30	9.66%
42" w/o Disp	9.70	16.30	26.00	8.20	16.20	24.40	1.60	6.56%
36" w/Disp	9.80	11.90	21.70	NA	NA	NA	NA	NA
36" w/o Disp	9.70	11.90	21.60	8.80	12.50	21.30	0.30	1.41%

SubZero Energy Comparison

	Monogram			SubZero			Difference Monogram is % More Energy Efficient
	Energy Kwh	Capacity Cu Ft	Kwh Cu Ft	Energy Kwh	Capacity Cu Ft	Kwh Cu Ft	
48" w/Disp	710.00	30.70	23.13	751.00	28.00	26.82	13.77%
48" w/o Disp	697.00	30.60	22.78	679.00	28.70	23.66	3.72%
42" w/Disp	655.00	26.10	25.10	698.00	23.80	29.33	14.43%
42" w/o Disp	655.00	26.00	25.19	653.00	24.40	26.76	5.87%
36" w/Disp	615.00	21.70	28.34	NA	NA	NA	NA
36" w/o Disp	615.00	21.62	28.45	640.00	21.30	30.05	5.33%

Data based on literature available at the time of printing.

36" Built-In Bottom-Freezer Refrigerators

Models:	ZIC360NMRH, ZICS360NMRH ZIC360NMLH, ZICS360NMLH
Capacity	
Total (cu. ft.)	20.6
Fresh Food (cu. ft.)	14.5
Freezer (cu. ft.)	6.1
Fresh Food Features	
Upfront Dual Electronic Controls	•
Multi-Shelf Air Management Tower	•
Adj. Spill-Proof Glass Shelves	4 Adj., 1 Fixed
Sealed Adj. Humidity, Slide-Out Produce Pans w/Easy Access Lids on Full Extension Slides	2
Sealed Deli Pan with Full Extension Slides	2
Adjustable Door Bins	6
Gallon Door Storage	•
Sealed Dairy Compartment	2
Egg Bin, Wine Caddy	•
Glass-Covered Butter Dish	•
Freezer Section	
Freezer Drawer on Full Extension Slides	•
Independent Utility Basket on Full Extension Slides	•
Automatic Icemaker	•
Removable Ice Storage Bin	•
General Features	
GE SmartWater™ Filtration System	•
Easy Access Hinged Grille	•
Master Light Control Switch	•
Independent Temperature Controls	•
Overall Dimensions (WxHxD in inches)	36 x 84 x 23-7/8
115 volts/20 Amps	•

Warranty Information:

- Full Two-year Warranty, parts and labor.
- Full Five-year Warranty, parts and labor on the sealed refrigerating system (the compressor, condenser, evaporator and all connecting tubing).
- Limited Twelve-Year Warranty on the sealed system, parts.
- Limited Lifetime Warranty on full extension slides.

See written warranty for details.

Refer to Design Guide and Installation Instructions for complete details:

Pub. No. 49-60136

The Basics:

- ✓ Trimmed refrigerators are designed to be customized with field installed 1/4" framed or 3/4" overlay door and grille panels. No kits required.
- ✓ New stainless steel refrigerators have beveled door edges and tubular stainless steel handles that coordinate with other Monogram appliances. These refrigerators are shipped ready for installation.
- ✓ Exclusive easy access grille panel.
- ✓ 2-position handles adjust to accommodate 1/4" framed or 3/4" overlay panel thickness. Or, on 3/4" panels, replace the supplied handles with custom handles of your choice – order ZKHCS2 for handle side trim.
- ✓ The 2-position door stop is factory set for a 130° door swing and can be adjusted to stop at 90°. Again, no kit required for this adjustment.
- ✓ Easy height adjustment. 83-1/2" to 84-1/2" installation heights are accomplished by adjusting the leveling legs and wheels. No kits required.

Advance Planning for Bottom Freezer

Monogram refrigerators can be a focal point in the kitchen, or can blend into the woodwork. Follow these steps to accomplish the effect you have envisioned.

1. Review the kitchen layout. These refrigerators are factory set for left or right door swings. The door swing is NOT reversible. Choose RH models with hinge on the right side, the door swings left to right. Choose a LH models with hinge on the left side, the door swings right to left.
2. Choose a stainless steel model **OR** a trimmed model that can be customized to match panels and handles with surrounding cabinetry.
3. Order custom door and grille panels from the cabinet manufacturer. See custom panel sizes, page 28. Optional black, white and stainless steel accessory panels may be ordered from your Monogram supplier.


Accessory Panels

Accessory panels are cut to size and ready to install.

Black	White	Stainless Steel
ZPBC360	ZPWC360	ZPSC360

Product Dimensions and Clearances


*Shipping height. The refrigerator can be adjusted to fit into a cutout that is 83-1/2" min. to 84-1/2" max. height. Note that the top case trim at the front is 1/2" higher and will overlap upper cabinetry or soffit. Use leveling legs and wheels for height adjustment.

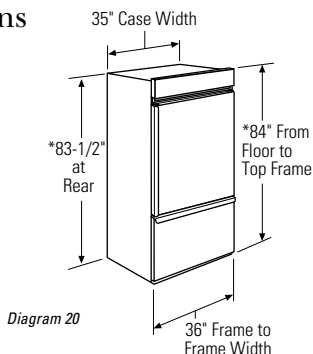

The Installation Space

The finished cutout width must be 35-1/2".



Water and electrical supply must be located as shown.

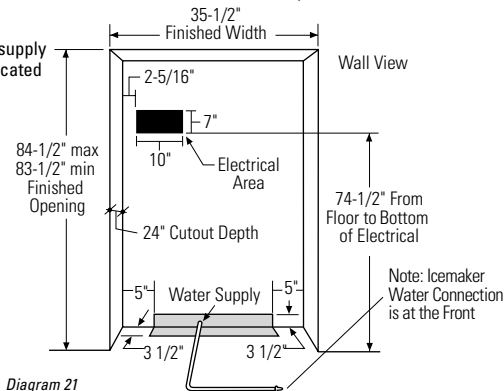

Note: The case trim overlaps cabinets at the top and sides. Frameless cabinets may require filler strips to prevent interference with cabinet door swing. The opening width must allow for filler strips.

Corner Installation

These refrigerators have a 2-position door stop. The factory set 130° door swing can be adjusted to 90° if clearance to adjacent cabinets or walls is restricted.

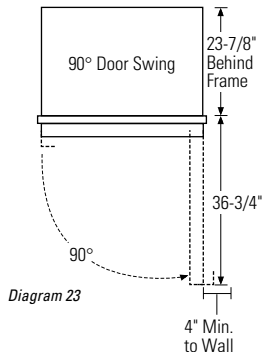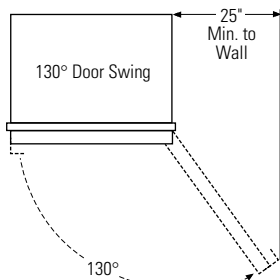


Allow 25" for a full 130° door swing. Allow 15" for pan removal. 4" min. clearance is required when adjusted to 90°. Pan access is maintained, but pan removal is restricted.

Simplified Customization

Field installed custom door and grille panels are required for trimmed models.

1/4" Framed Panels


You may install 1/4" thick custom panels from your cabinet manufacturer. The decorative panel slides into the factory installed trim. No kits required.

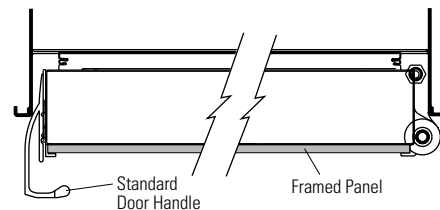

Standard supplied handles shown in 1/4" panel position.

3/4" Overlay Panels


You may also choose to install 3/4" custom overlay panels from your cabinet manufacturer. This design provides a seamless appearance which integrates smoothly with surrounding cabinetry. The panels slide into the factory installed trim, without additional kits.

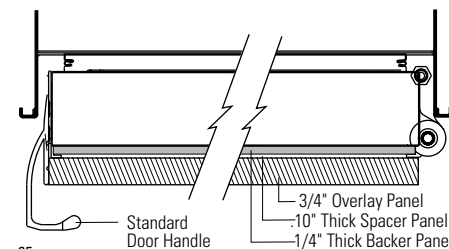

Standard supplied handles shown in 3/4" overlay panel position.

Handle Adjustment

The supplied handles can be adjusted to fit both framed or overlay panels. Or, custom handles supplied by your cabinet maker may also be installed.

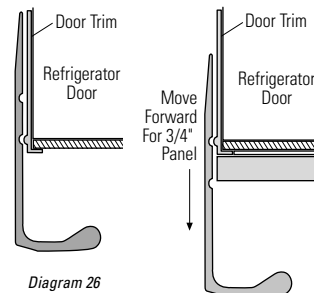

Bottom-Freezer 1/4" Framed Panel Dimensions

If you choose to install framed panels, they must be cut to the dimensions shown. The panels will slide into the frame on the door, drawer and grille.

- If the panel is less than 1/4" thick, it must be backed up with filler material or foam tape to improve the fit.

1/4" Framed Panel Dimensions (in inches)

	A (Width)	B (Grille Ht)	C (FF Ht.)	D (FZ Ht)
Framed Panel	33-7/8	8-7/8	46-1/6	21-7/8

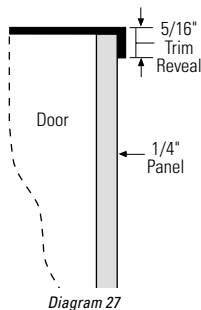


Diagram 27

3/4" Overlay Panel Dimensions

Overlay panels may be installed on the trimmed refrigerator.

- The overlay panel must be secured to a 1/4" thick backer panel which slides into the trim. A .10" thick spacer panel must be placed between the custom and backer panel.

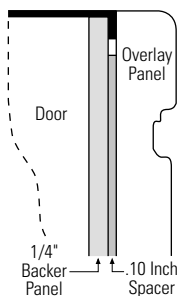



Diagram 28

IMPORTANT NOTE:

Maximum total weight for fresh food panel is 50 pounds and 30 pounds for the freezer drawer panel.




Diagram 30

Diagram 29

Assemble overlay panels with glue and screws.

- Center spacer panel on the backer panel, left to right and top to bottom. Secure the panels with glue.
- Center the spacer/backer panel on the overlay panel. Secure with glue and screws. Countersink screws into the backer panel.

Note: Left-to-right offset is not always equal to top-to-bottom offset.

3/4" Overlay Panel Dimensions (in inches)

	A (Width)	B (Grille Ht.)	C (FF Ht.)	D (FZ Ht.)
1/4" Backer	33-7/8	8-7/8	46-1/6	21-7/8
0.10" Spacer	32-1/2	7-5/8	44-11/16	20-1/2
3/4" Overlay	34-1/8	9	46-5/16	22

Optional Accessory Kits

- ZKHCSS2: Monogram Stainless Steel Tubular Handle Kit and Handle Side Trim for custom handles. For use on 3/4" custom panels.
- ZUG2: For side by side installation of two trimmed bottom freezer refrigerators. This kit supports a unified grille panel to span the width of two units using either a 1/4" framed or 3/4" overlay panel.
- ZUGSS2: For side by side installation of two stainless steel bottom-freezer refrigerators. This kit provides a unified stainless steel grille panel to span the width of two units.



Diagram 31

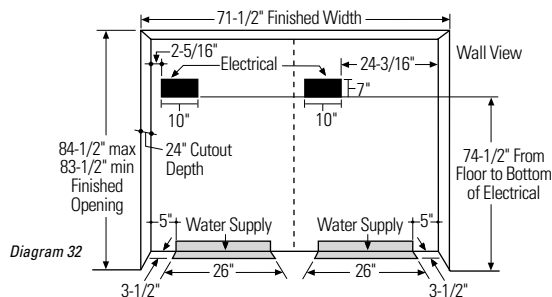


Diagram 32

ZUG2 Grille Panel Dimensions




Diagram 33

Panel Dimensions (in inches)

	A (Width)	B (Grille Ht.)
1/4" Framed Panel	69-7/8	8-7/8

3/4" Overlay Panel Dimensions (in inches)

	A (Width)	B (Grille Ht.)
1/4" Backer Panel	69-7/8	8-7/8
0.10" Spacer Panel	68-1/2	7-5/8
3/4" Overlay Panel	70-1/8	9

Assemble the overlay panels as shown for door panels.

Anti-Tip Protection is Required

These refrigerators are top-heavy. They must be secured to prevent the possibility of tipping forward. Anti-tip brackets are packed with the refrigerator. For additional security, the refrigerator should also be secured to adjacent cabinetry. See installation instructions for details.

36" Built-In All Refrigerators, All Freezers

	ZIR36NMRH ZIR36NMLH ZIRS36NMRH ZIRS36NMLH	ZIF36NMRH ZIF36NMLH ZIFS36NMRH ZIFS36NMLH
Description	All Refrigerator	All Freezer
Total (cu. ft.)	21.9	21.9
Spill-Proof Glass Shelves	6 Adj./1 Fixed	
Adj. Humidity Produce Pan w/Easy Access Lids on Full Extension Slides	2 Extra-Large	
Sealed Snack Pan with Full Extension Slides	2 Regular	
Wine Caddy	•	
Wire Shelves		5 Adj./1 Fixed 1 Full Width Fixed
Wire Baskets on Full Extension Slides	4 Large	2 Extra-Large
Door Bins	4	8
Gallon Door Storage	2	2
Sealed Dairy Comp.	2	
Egg Bin	•	
Glass-Covered Butter Dish	•	
Automatic Icemaker		•
Removable Ice Storage Bin		•
General Features		
Sealed System Design	Auto Cycle Defrost	Automatic Defrost
Four-Point Leveling System	•	•
130° Door Stops	•	•
Coil-Free Back	•	•
Accepts 1/4" and 3/4"		
Custom Panels, Handles	ZIR36	ZIF36
Standard Extruded Handles	ZIF36	ZIR36
Stainless Steel Tubular Handles	ZIFS36	ZIRS36
Overall Dimensions (WxHxD in inches)	← 36" x 84 x 24-3/4" →	
115 volts/20 Amps	← • →	

Warranty Information:

- Full Two-year Warranty, parts and labor.
- Full Five-year Warranty, parts and labor on the sealed refrigeration system
- Limited Twelve-Year Warranty on the sealed system, parts.
- Limited Lifetime Warranty on full extension slides.

See written warranty for details.


Refer to Installation Instructions for complete details:

Pub. No. 49-60055 for ZIF36 and ZIR36 models.

Pub. No. 49-60073 for ZIFS36 and ZIRS36 Stainless Steel Models


Cutout and Product Dimensions

These Monogram refrigerators and freezers may be installed flush or semi-flush to adjacent cabinetry.

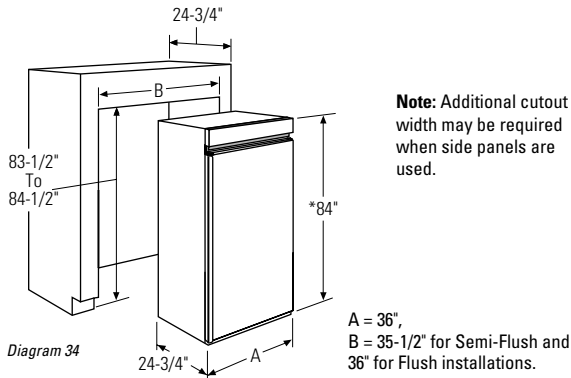


* Shipping height. Height may be changed to 83-1/2" or 84-1/2" using ZGC2 grille panel kit. The ZKTR36 kits for 3/4" thick panels provide a grille panel support for all heights.

The Installation Space

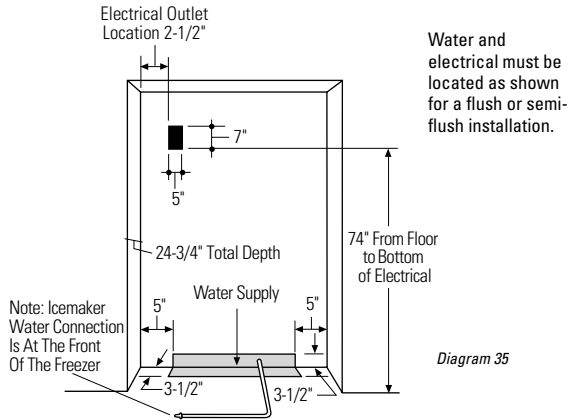

Anti-Tip Protection is Required

These refrigerators are top-heavy. They must be secured to prevent the possibility of tipping forward. Anti-tip brackets are packed

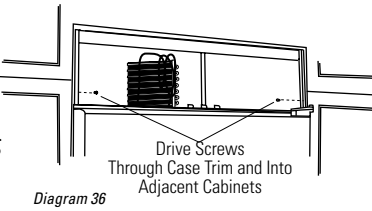

with the refrigerator. For additional security, the refrigerator should also be secured to adjacent cabinetry. See installation instructions for details.

Clearances:

- Factory set for a 130° door swing. Order WX14X99 adjustable door stop to reduce swing to as little as 90°.

When Installed into a corner:

Allow 25" for a full 130° door swing. Allow 15" for pan removal. Allow 4" min. clearance when door swing is adjusted to a 90° opening for pan access, but pan removal is restricted.

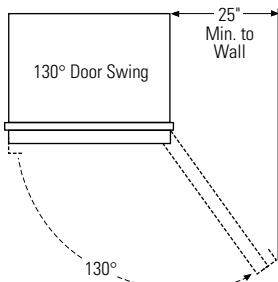


Diagram 37

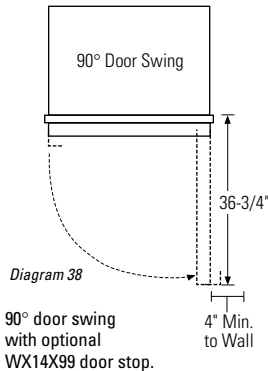


Diagram 38

90° door swing with optional WX14X99 door stop.

Cutout and Clearances for Multiple Single Door Installations

For a complete food storage center, install a Monogram All Fresh Food and All Refrigerator, side-by-side.

For a flush fit in typical 24-3/4" cabinetry, the finished cutout width must be at least 72" wide, and 71-1/2" wide for a semi-flush installation.

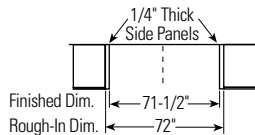


Diagram 39

When installing an All Refrigerator and All Freezer side-by-side, allow 25" for a full 130° door swing, or 15" min. on the hinge sides for pan access.

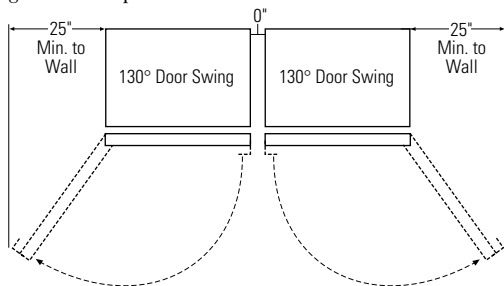


Diagram 40

ZUG75 or ZUGSS Unified grille panel kits are available for side-by-side installations. See Trim Kit descriptions.

The Basics:

- ✓ Both trimmed and stainless steel models may be installed flush or semi-flush with surrounding cabinetry.
- ✓ ZIFS36 and ZIRS36 stainless steel refrigerators and freezers are shipped ready for installation.
- ✓ ZIF36 and ZIR36 trimmed models are designed to be customized with decorative panels. Field installed custom door and grille panels are required.
 - Trim kits must be used to accommodate 3/4" trimless panels, custom handles or for installation heights of 83-1/2" or 84-1/2". See Trim Kit Descriptions.

Advance Planning for All Refrigerator and All Freezer

These refrigerators and freezers can be a focal point in the kitchen or, can blend into the woodwork. Install together for a complete food storage center. Follow these steps to accomplish the effect you have envisioned.

1. Review the kitchen layout. These products are factory set for left or right door swings. The door swing is NOT reversible. Choose RH models with hinge on the right side, the door swings left to right. Choose a LH models with hinge on the left side, the door swings right to left.
2. Choose a stainless steel model **OR** a model that can be customized to match panels and handles with surrounding cabinetry.
3. Order the trim kit(s). A full range of appearance options can be accomplished with one or more trim kits. See trim kit descriptions, page 34. (**Note, stainless steel models do not accept trim kits.**)
4. Order custom door and grille panels from the cabinet manufacturer. Custom panel sizes vary depending on the trim kit or combination of kits being used. See Custom Panel Sizes, page 36. **Note: 1/4" Accessory Panel Kits are available from GE, in white, black and stainless steel.**
5. Side panels are required when the sides of the refrigerator will be exposed. The cabinet manufacturer should supply these panels.
6. Determine installation height. Height adjustment is accomplished by changing the grille panel size. See Grille Panel Sizes, page 37.

Trim Kit Descriptions:

Use one or more kits to accomplish a wide range of appearances on the following trimmed models:
ZIR36NMLH, ZIF36NMLH (hinge on left side)
ZIR36NMRH, ZIF36NMRH (hinge on right side)

Door Handles – To match or complement cabinetry!

ZKHR1 – Provides the necessary framework to install a custom handle *of your choice*, onto a 1/4" thick custom panel. (Handle not included.)

ZKHTR1 – Provides the necessary framework to install a custom handle *of your choice*, onto a 3/4" thick custom panel. (Handle not included.) This kit must be used in combination with ZKTR36LH or ZKTR36RH.

ZKHRSS1 – Tubular stainless steel handle for 1/4" thick panel installation.

ZKHTRSS1 – Tubular stainless steel handle for 3/4" thick panel installation. This kit must be used in combination with ZKTR36LH or ZKTR36RH.

Custom Panels – Match the cabinetry!

ZKTR36LH for ZIR36NDLH, ZIF36NDLH

ZKTR36RH for ZIR36NDRH, ZIF36NDRH

Provides for the installation of 3/4" thick custom door and grille panels. Use this kit for a trimless appearance. This kit provides a standard handle to fit the 3/4" panel.

Grille Panel – For Installation height adjustments!

ZGC2 – Provides 1/4" grille panel frame side pieces for 83-1/2" and 84-1/2" installation heights. The supplied grille panel frame is set for 84".

Side-by-side Installation

ZUG75 Trim Kit – For side-by-side installation of two trimmed units. This kit provides for the installation of a unified 3/4" grille panel to span the width of two units. Includes a trim strip to cover inside case trim for a finished appearance. This kit must be used in combination with both the ZKTR36LH and ZKTR36RH kits.

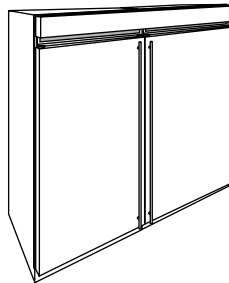


Diagram 41

Stainless Steel Trim Kits:

Stainless steel models do not accept custom panels or custom handles. However, you may wish to change the installation height or use a side-by-side kit. Order these kits for models:

ZIRS36NMLH, ZIFS36NMLH (hinge on left side)

ZIRS36NMRH, ZIFS36NMRH (hinge on right side)

ZGCSS36RH, ZGCSS36LH – Grille Panel Kits

The supplied grille panel is sized for an 84" installation height. This kit includes grille panels for 83-1/2" and 84-1/2" installation heights. Order "LH" or "RH" to match your model.

Side-by-side Installation

ZUGSS – For side-by-side installation of two stainless steel units. This kit provides a unified stainless steel grille panel to span the width of two units. Includes a trim strip to cover inside case trim for a finished appearance.

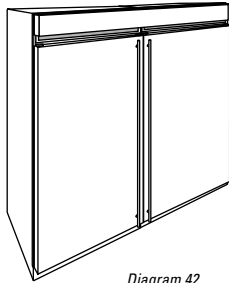


Diagram 42

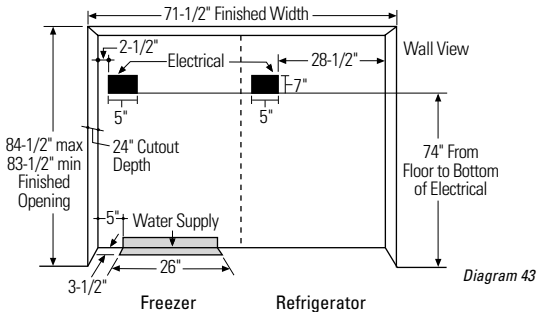


Diagram 43


Additional cutout width may be required when side panels are used.

1/4" Accessory Panels:

Factory trim accepts accessory panel kits. Panels are cut to size and ready to install. Kits must be ordered separately.

Models	White Lexan®	Black Lexan®	Stainless Steel
ZIR36/ZIF36	ZWWR36	ZWBR36	ZWSR36


All Refrigerator, All Freezer Custom Panel Dimensions

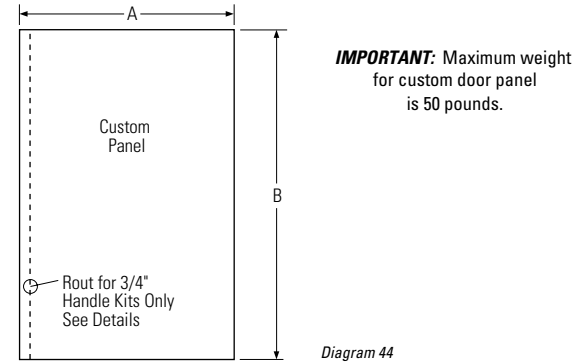

CUSTOM DOOR PANEL SIZES


SIZES	A	B
1/4" Panels	35-1/16"	68-7/8"
3/4" Panels	35-1/16"	68-15/16"
3/4" Panels (custom handles)	35-1/4"	68-15/16"

Routing Detail

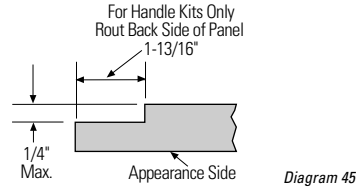

Route the panel when installing a ZKHTR1 Custom Handle Kit or ZKHTRSS1, Tubular Stainless Steel Handle Kit.

Custom Grille Panel Dimensions



1/4" THICK CUSTOM GRILLE PANEL.

Panel Width	*Panel Height to fit Installation Heights		
	83-1/2"	84"	84-1/2"
35-1/8"	7-1/2"	8"	8-1/2"

Note: The grille panel frame is factory assembled for 84" installation height. Order ZGC2 Grille Panel Kit when installation height is more or less than 84".


3/4" THICK CUSTOM GRILLE PANEL.
Requires ZKTR36 Trim Kit.

Panel Width	Panel Height to fit Installation Heights		
	83-1/2"	84"	84-1/2"
35-1/4"	7-3/4"	8-1/4"	8-3/4"

Note: A grille panel support is included with the ZKTR36 trim kit and fits all installation heights.

ZUG75 Grille Panel Dimensions

This grill panel kit should be used in combination with both the ZKTR36LH and ZKTR36RH, 3/4" panel kits.



3/4" THICK CUSTOM GRILLE PANEL
For ZUG75 Trim Kit

Panel Width	Panel Height to fit Installations Heights		
	83-1/2"	84"	84-1/2"
71-3/8"	7-3/4"	8-1/4"	8-3/4"

Free-Standing Refrigerator Features

	ZFSB26DNSS	ZFSB23DNSS
Capacity		
Total (cu. ft.)	25.5	22.6
Fresh Food (cu. ft.)	16.0	14.4
Freezer (cu. ft.)	9.5	8.2
Extra-Tall Dispenser With Cubes, Crushed Ice & Chilled Water	•	•
Fresh Food Features		
Upright Electronic Controls With Digital Readout	•	•
Tri-Level Light System	•	•
Multi-Shelf Air Management Tower	•	•
QuickSpace™ Shelf	•	•
Climate Control Drawer with Express Chill, & Thaw, Select Temp	•	•
Adj. Spill-Proof Glass Shelves	3 (2 Slide-Out)	3 (2 Slide-Out)
Adj. Humidity, Slide-Out Produce Pan	•	•
Sealed Deli Pan	•	•
Adj. Temp. Slide-Out Meat Pan	•	•
Clear Bins and Pans	•	•
Gallon Door Storage	•	•
Dairy Compartment	•	•
Wine Caddy, Covered Butter Dish	•	•
Freezer Section		
Utility Baskets	3 (2 Full Ext.)	3 (2 Full Ext.)
Adjustable Shelves (wire)	2 (1 Slide-Out)	2 (1 Slide-Out)
Tilt-Out Wire Door Bins	3 (2 Adj.)	3 (2 Adj.)
Removable Ice Storage Bin	•	•
GE SmartWater™ Filtration System	•	•
General Features		
Energy Star® Qualified	•	•
Concealed Door Hinge	•	•
Leveling System	•	•
Coil-Free Back	•	•
Overall Dimensions (WxHxD in inches)	36x72x34	36x72x31
115 volts/20 Amps	•	•

Warranty Information:



- Full One-year Warranty, parts and labor.
 - Full Five-year Warranty, parts and labor on the sealed refrigerating system (the compressor, condenser, evaporator and all connecting tubing).
- See written warranty for details.

Refer to Installation Instructions for complete details:

Pub. No. 49-60160 for ZFSB26DNSS

Pub. No. 49-60227 for ZFSB23DNSS



Free-Standing Refrigerator Dimensions and Clearances

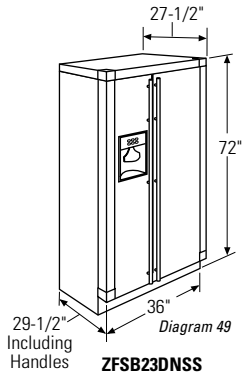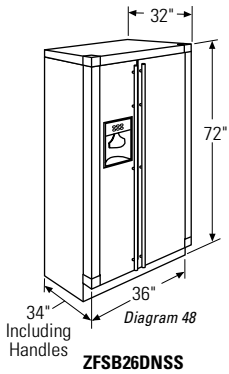

Important Installation Note:

Door and passageways into the installation location require 36" min. opening. If the opening is less than 36", the top cap and doors must be removed. See installation instructions for details.

ZFSB26 and ZFSB23

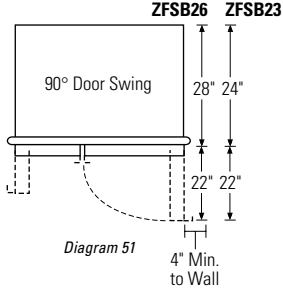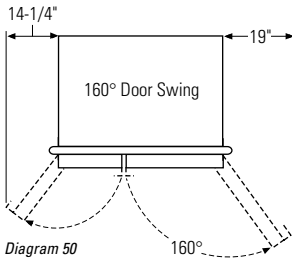

Installation in a corner:

- Allow 4" min. clearance on each side for a 90° opening and access to drawers.
- Allow 14-1/4" clearance on the freezer side for removal of ice bin.
- Allow 19" clearance on the fresh food side for removal of drawers.
- Allow 1/8" on each side and 1" at the top and back side for proper air circulation.

New Features:

- ✓ New design, completely encased in stainless steel.
- ✓ Extra-tall dispenser for crushed ice, cubes and chilled water. Control Lock, Quick Ice, Night Light and Door Alarm Settings.
- ✓ Climate Control Drawer is a system of dampers, a fan, a temperature thermister and a heater. This system provides:
 - Express Thaw 1/2 lb. in 4 hours, 1-1/2 lbs. in 8 hours and 3 lbs in 12 hours.
 - Express Chill a 12 oz. beverage can in 15 minutes, 2 to 6 beverages or a bottle of wine in 30 minutes.
 - Select Temp offers a citrus setting at 43°F, produce setting at 34°F and a meat setting at 32°F.

Wine Chiller & Beverage Center

	ZDWC240NBS Wine Chiller	ZDBC240NBS Beverage Center
Capacity		
Capacity (Cu. Ft.)	5.0	5.0
Storage	57 Wine Bottles	12 Wine Bottles
	45 Wine Bottles 24 12-oz. cans	126, 12-oz. cans 150, 12-oz. cans
Spill-Proof Tempered Glass Shelves		3
Slide-Out Drawers on Accuride® Full Extension Slides	5 Full Size 2 Half-Size	2 Half-Size
Adj. Temp. Control Beverage Center		Mid 30° - Upper 40°
Adj. Temp. Control Wine Section	Low 40° - Mid 60°	Mid 40° - Mid 50°
Interior Light	Auto/Manual	Auto/Manual
General Features		
Stainless Steel Tubular Handles/Brushed Trim	•	•
Tinted Glass Door	•	•
Installation Options	← Built-In or Free-Standing →	
Reversible Door Swing	•	•
Overall Dimensions (WxHxD) in inches	← 23-1/2 x 34-1/4 x 24-3/8 →	
Amps @ 120 Volts	2.0	2.0

Warranty Information:

- Full One-year Warranty, parts and labor.
 - Full Five-year Warranty, parts and labor on the sealed refrigerating system.
 - Limited Lifetime Warranty on Accuride® slides.
- See written warranty for details.

Features:


- Black case and black vented toekick.
- Tubular stainless steel handles and brushed trim door with chamfered edge surround the tinted glass door.
- The interiors are designed to hold specific products. The wine chiller has 7 drawers for holding wine bottles. The beverage center has 2 drawers for beverages and 3 spill-proof glass shelves.
- The interior light comes on when the door is opened or a manual switch at the top allows the light to stay on for viewing. Upfront controls at the top.

Refer to Installation Instructions for details.

Pub. No. 49-60210

Advance Planning

The Monogram wine chiller and beverage center offer the ultimate in convenience.

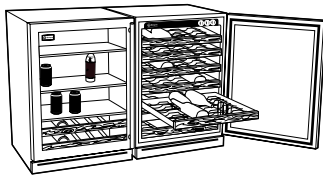

Wine Chiller
ZDWC24NBS with Black Case
Beverage Center
ZDBC240NBS with Black Case

Diagram 52

- Both appliances are vented at the front toekick to allow built-in under counter installation. Both may be used free-standing.
- The door swing is reversible on both models. No kits required.

Cutout and Product Dimensions

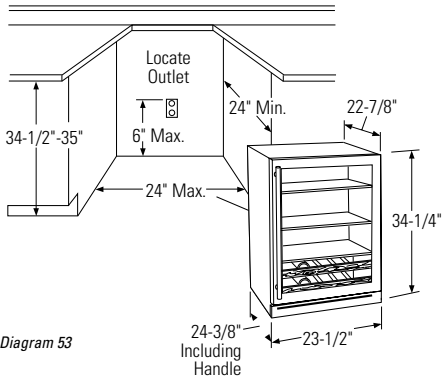


Diagram 53

Note: If installing between frameless cabinets, a 1/2" wide filler strip or side panel may be required. The filler strip will act as a spacer between the door case and adjacent cabinet and will prevent interference with cabinet door swing. The width of the opening must include filler panels.

Corner Installation

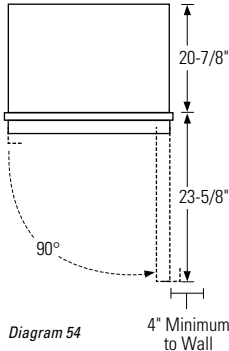


Diagram 54

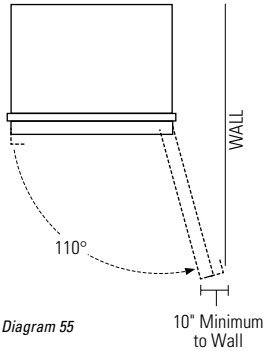


Diagram 55

The wine chiller and beverage center is factory set for a 110° door swing.

- Allow 4" min. clearance on the hinge side for the 90° door swing and to allow racks to slide out.
- Allow 10" min. clearance on the hinge side for a full 110° door swing.

Automatic Icemaker Features


Models	ZDI15CBB, ZDI15CWW, ZDIS15CSS
Capacity	
Daily Ice Production	50 lbs.
Storage Bin	25 lbs.
Convenience	
Automatic Shut-Off	•
Ice Scoop	•
Interior Light	•
Cycles	On/Off/Clean
Clean Light	•
General Features	
Installation Options	Built-In or Free-standing
Accepts 3/4" Custom Panels	ZIP75WW/ZIP75BB
Full-Length Door	•
Reversible Door Swing	•
Leveling System	•
Overall Dimensions (WxHxD) in inches	14-13/16 x 34 - 34-1/2 x 23-5/16
Amps @ 115 Volts	5.3
Approx. Shipping Weight (lbs)	110

Warranty Information:

- Full One-year Warranty, parts and labor.
- Full Five-year Warranty, parts and labor on the sealed refrigerating system (the compressor, evaporator and all connecting tubing).

See written warranty for details.

Cutout and Product Dimensions

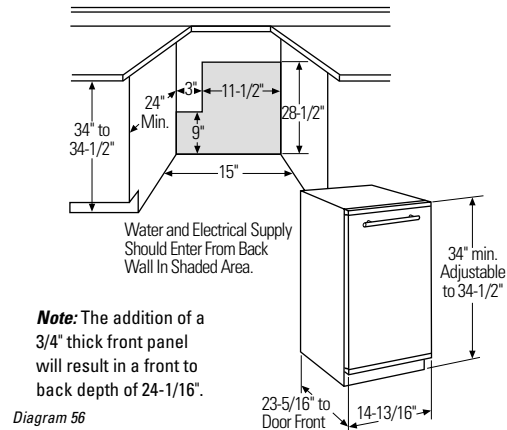

Note: If installing between frameless cabinets or when a 3/4" custom panel is installed, a 1/2" wide filler strip or side panel may be required. The filler strip will act as a spacer between the door case and adjacent cabinet and will prevent interference with cabinet door swing. The width of the opening must include filler panels.

Refer to Installation Instructions for details.

Pub. No. 49-60016

Advance Planning

The Monogram icemaker is available in black, white and stainless steel. Black and white models can be customized with a 3/4" thick trimless panel. The stainless steel wrap model has a tubular handle to coordinate with other Monogram appliances.

Models: ZDI15CBB, Black
ZDI15CWW, White
ZDIS15CSS, Stainless Steel

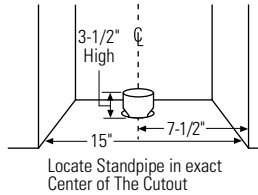


Diagram 57

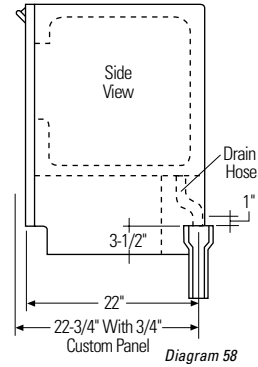


Diagram 58

- A method of drainage must be determined in advance.
- Drain lines must be at least 5/8" inside diameter.
- The ideal installation has a standpipe with a 2" to 1-1/2" PVC drain reducer installed directly below the outlet of the drain tube. The standpipe must be accurately located to prevent interference when sliding the icemaker into an opening. The installation of a 3/4" custom panel will influence floor drain location.
- When a floor drain is not located below the icemaker, order ZPK1 Drain pump kit. This pump fits into the icemaker base.
- The door swing is reversible. No kits required.

Custom Panel Trim Kit

Order ZIP75WW, white or ZIP75BB, black, 3/4" trimless custom panel kit. Cut edges and approx. 1/2" of the edge along the back side can be seen and must be finished. Custom handles may be used with this kit. A 1/2" wide filler strip may be required on the hinge side to ensure a full door swing.

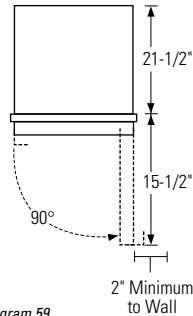


Diagram 59

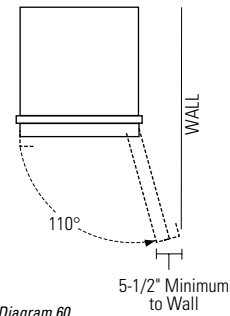


Diagram 60