




Monogram®

ZX2LYSS – GE Monogram™ Dual Burner Outdoor Cooktop

Dimensions and Specifications (in inches)

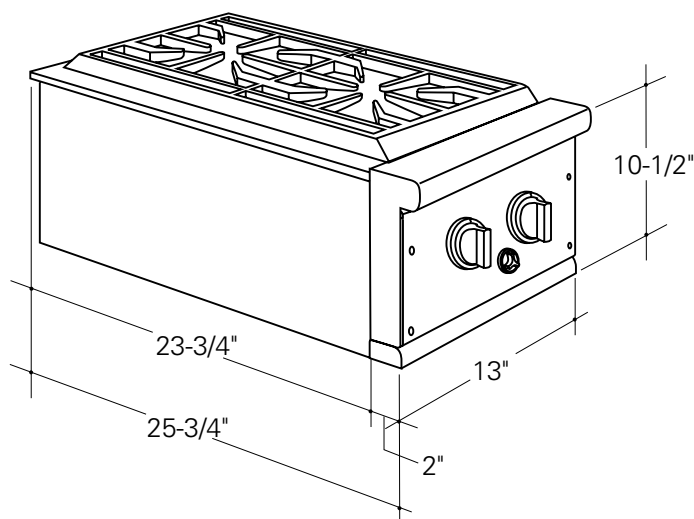

Note: Reference pub. no. 49-80009-3, Monogram Outdoor Cooking Center Installation Instructions, for complete details. Reference pub. no. 49-8842-2, Monogram Outdoor Cooking Center Cart Installation Instructions, for complete details.

Dual Burner Natural Gas Model: 2 Gas Cooktop Burners

- Monogram Outdoor Cooking Centers are designed to be installed on a grill cart or into an enclosure.
- Monogram Range Top Burners can be mounted to the right side of Monogram 2" wide grill which has been installed on a cart. They can also be installed in a combustible or noncombustible enclosure.
- **These burners are designed for outdoor use only.** Do not locate the grill in a building, garage or other enclosed area.
- Ensure that fresh air ventilation is adequate.
- Consider exposure to wind and proximity to traffic paths.
- The minimum clearances to combustibles must be maintained at all times.
- Do not install a grill below overhead unprotected combustible construction.
- The installation must conform to local codes or in the absence of local codes, with the national fuel gas code, ANSI Z223 latest edition.



Listed by
Underwriters
Laboratories


For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Monogram®


ZX2LYSS – GE Monogram™ Dual Burner Outdoor Cooktop

Dimensions and Specifications (in inches)

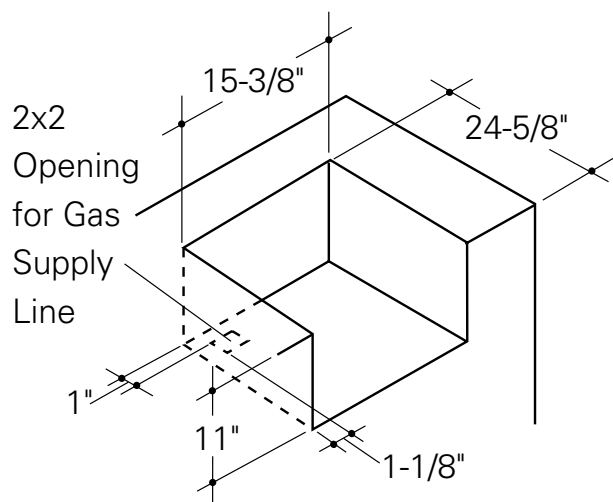

Installation in a combustible enclosure. ZX2JYSS insulated jacket is required.

- Combustible enclosures require insulated jackets. ZX2JYSS models. The insulated jacket must be supported from the bottom by a solid deck or ledge on each side beneath the jacket.
- Construct the enclosure as shown and place the insulated jacket into the enclosure. Place the cooking center into the jacket. No installation hardware is required.

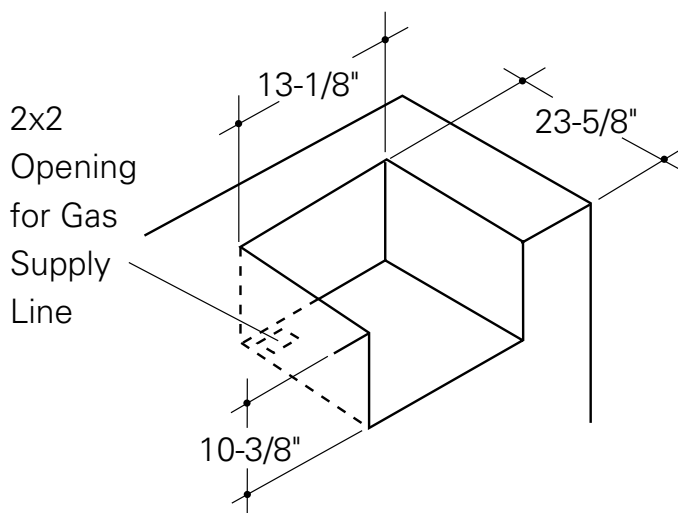

Installation in a non-combustible enclosure.

- In a non-combustible (masonry) enclosure, the burner drops into the opening and. A solid deck beneath is required for support from the bottom.

Clearances – All Models

- When installed on the side of a grill cart, allow 6" clearance at the rear and right side to vertical combustible materials.
- When installed in an enclosure, allow 6" clearance at the rear and both sides to vertical combustible materials.
- When installed in a combustible enclosure, the cooking surface should be 1" above adjacent horizontal surface.




Listed by
Underwriters
Laboratories

For answers to your Monogram®, GE Profile™ or GE® appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



Monogram®

ZX2LYSS – GE Monogram™ Dual Burner Outdoor Cooktop

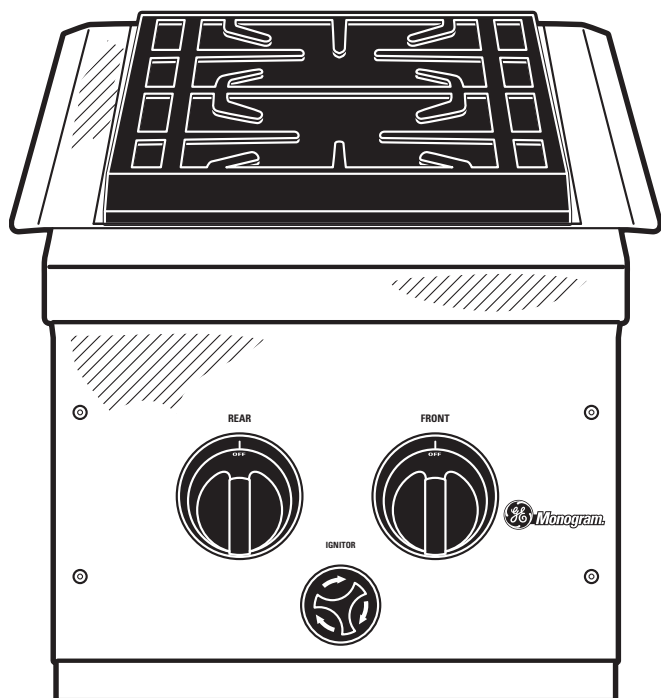

Features and Benefits

- Liquid Propane Model
- 2 (15,000 BTU) Cast Iron Gas Cooktop Burners
- Porcelainized, Cast Iron Burner Grates
- Rotary Multi-Spark Piezo Ignition
- Brass Control Valves
- Stainless Steel, Slide-Out Drip Tray
- Stainless Steel Cooktop Burner Cover
- Model ZX2NYSS – Natural Gas
- Model ZX2LYSS – Liquid Propane Gas