

15" Nugget Ice Machine

CNP115: 15" Nugget Ice Machine



CNP115

CNP115

Features and Specifications

Industry exclusive U-Choose™ feature offers five levels of ice density
Produces up to 90 lb of ice per day
Stores 30 lb of ice
Makes cylindrical compressed ice bits approx. 3/4" L x 1/2" H
Indicator alert notifies when cleaning is needed
Stainless steel cabinet, grille, and full-wrap door
NSF/ANSI Standard 12 compliant
Dimensions: 34 11/16" H x 14 15/16" W x 22 15/16" D
Easiest nugget ice machine cleaning process in the industry
Designed for built-in or freestanding applications
Factory installed drain pump
High efficiency variable speed compressor with 1.2 running amps
Environmentally friendly R600a refrigerant (1.06 oz)

Model Details

Model	Description	Voltage/Hz	Shipping Weight
UCNP115-SS01A	Nugget Ice Machine 15" Reversible Hinge Stainless Solid	115v / 60hz	96 lb


Accessories

Model	Description	Shipping Weight
ULALINEFILTERHEAD	In-Line Water Filter Head 3/8" NPT (Required for initial setup)	1 lb
ULALINEFILTER	In-Line Water Filter (Standard)	4.5 lb
ULANUGGETCLEANKIT	Includes 1 Bottle Nugget Ice Cleaner, Funnel, & Hose	1 lb
ULANUGGETCLEAN	Nugget Ice Cleaner (Single 8 oz. bottle)	1 lb
ULAWATERHOOKUP	Braided Water Supply Line Kit	2 lb




Product Specifications • 15" Nugget Ice Machine


Top

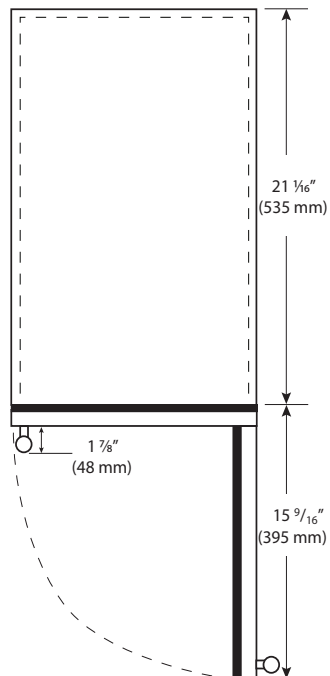


Front

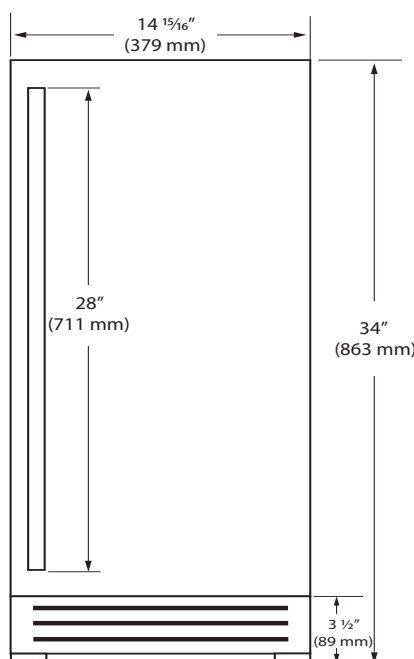

Side

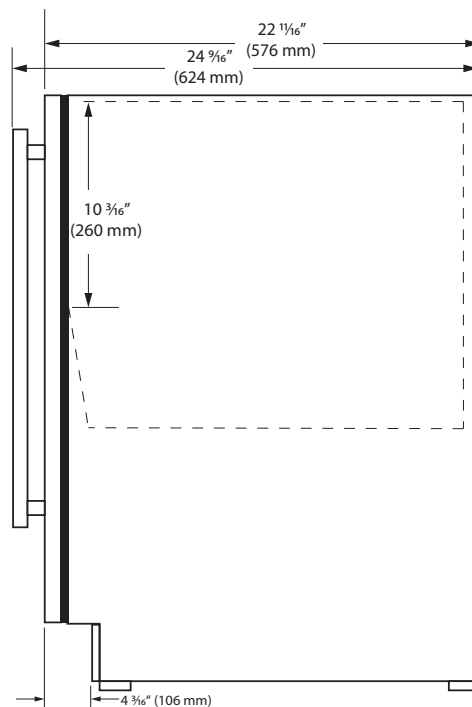

Back

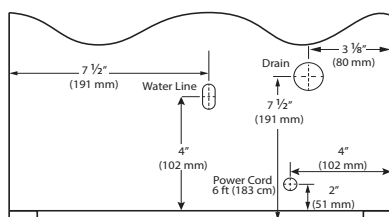

Water Mineral Content Requirements:


- TDS Greater than 5 ppm (mg/l) but less than 200 ppm (mg/l)
- Hardness: Less than 200 mg/l (12 gpg)

Not recommended for use with softened water

Water above 400 TDS must be treated by a water professional before installation.

Visit u-line.com/waterfilters to learn about water quality solutions.

Cabinet Cut-Out

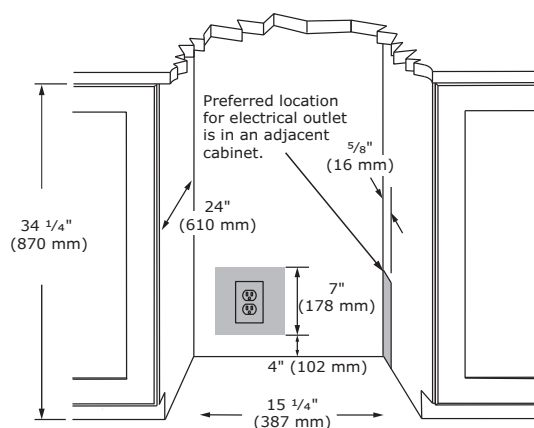

Commercial Warranty

1 Year (parts & labor) / 5 year sealed system (parts)

See complete warranty for details

Installation Notes

- Power cord extends 2" beyond total depth
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow