

Refrigeration Equipment 1-Door Sandwich/Salad Prep Table 29" Long 6-1/6, 2-1/9 Pan

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738255 (KCHST27.8)

1-Door Sandwich/Salad Prep
Table 29" Long 6-1/6, 2-1/9
Pan

Short Form Specification

Item No. _____

1-door sandwich/salad refrigerated preparation table. Exterior back panel and exterior bottom panel in galvanized steel, exterior side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 304 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 28.9x11.4x0.5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature and on-site reversible door feature, with required left side door hinges, for units with serial number 24020014 or later. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds (6) 1/6 & (2) 1/9 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.


Sustainability

- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Optional Accessories

- Drawer Kit for 29" Mega Top PNC 880615

APPROVAL: _____

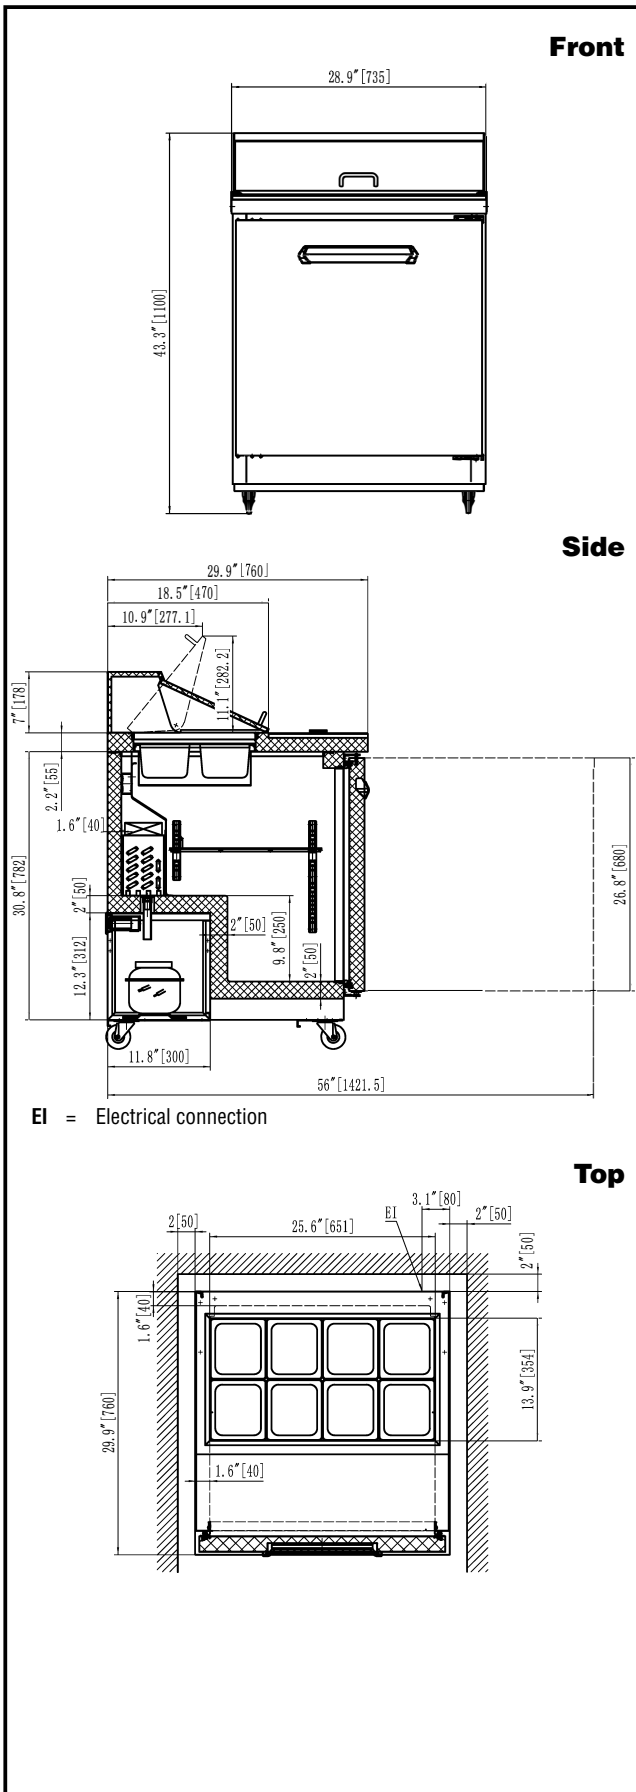

Electric

Supply voltage:	115 V/1 ph/60 Hz
Electrical power, max:	0.52 kW
Plug type:	USA NEMA 5-15P

Capacity:

Number and type of grids (included):	1 - 636x443
Gross capacity:	7 cu.feet

Key Information:

Type of grids (included):	Vinyl-Coated steel
Warranty:	3 / 5 years
Door hinges:	Right Side
External dimensions, Width:	28 15/16" (735 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	43 5/16" (1100 mm)
Number and type of doors:	1 Full
Internal Dimensions (depth):	23 13/16" / (605 mm)
Internal Dimensions (height):	23 1/2" / (597 mm)
Internal Dimensions (width):	24 1/16" / (611 mm)
Shipping height:	47 1/4" (1200 mm)
Shipping weight:	223 lbs (101 kg)
Shipping volume:	26.27 ft ³ (0.74 m ³)
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Approvals	ETL C&US; ETL SANITATION

Refrigeration Data

Current absorbed:	738255 (KCHST27.8)	3 Amps
Condenser type:		Fin & tube
Operating temperature min.:		32 °F
Compressor power:		1/5 hp
Operating temperature max.:		41 °F
Defrost type:		Auto Defrost

Sustainability

Refrigerant type:	R290
GWP Index:	3
Refrigerant weight:	85 g



Refrigeration Equipment
1-Door Sandwich/Salad Prep Table 29" Long 6-1/6, 2-1/9 Pan

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.